

M23


Weighing Module

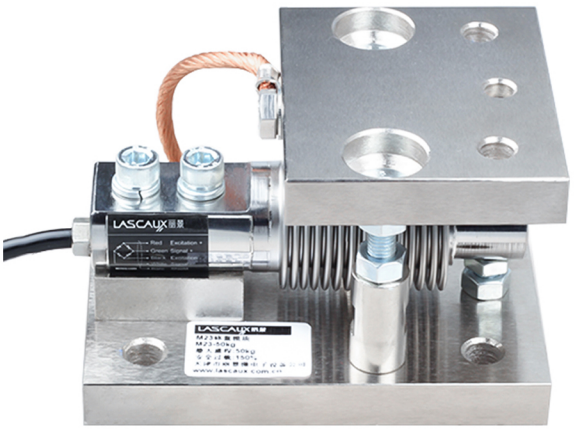

- Maximum Capacity (Emax) (kg): 10,20,50,100,200,300,500
- Suitable for tanks, silo, and other weighing control.

Features








- Unique structure, simplifies load cell installation on tanks, silo, and other weighing vessels
- Stainless steel material welded sealing load cell can be used
- High accuracy load cell, High comprehensive precision
- Remove the weighing error thermal expansion, contraction
- Support the bolt, prevent the equipment to avoid upsetting
- Reducing load cell damage and plant down-time
- Easily and quickly install
- Reducing load cell damage and plant down-time
- Suitable for tanks, silo, and others weighing control


Specifications


Load Cell		HBB
Rated Load	kg	10,20,50,100,200,300,500
Rated Output	mV/V	2±0.005
Safe overload	%R.C.	150
Ultimate overload	%R.C.	300
Degree of protection		IP68
Wiring code	Ex:	Red: + Black: -
	Sig:	Green: + White: -


天津市丽景微电子设备有限公司
Lascaux Microelectronic Device (Tianjin) Co.,Ltd.
电话 (Tel): +86 22 83719630 83719631 83719632
传真 (Fax):+86 22 83719632

Dimensions (in mm)

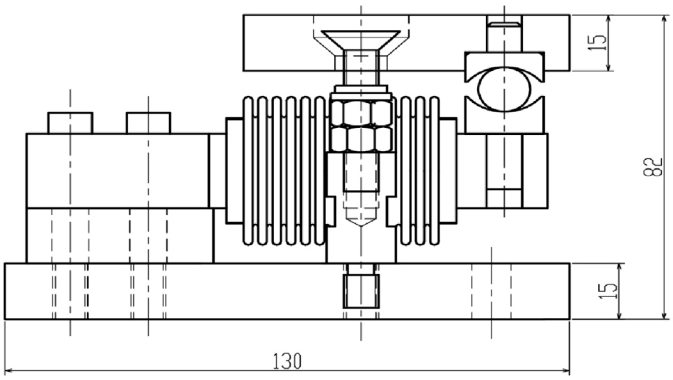


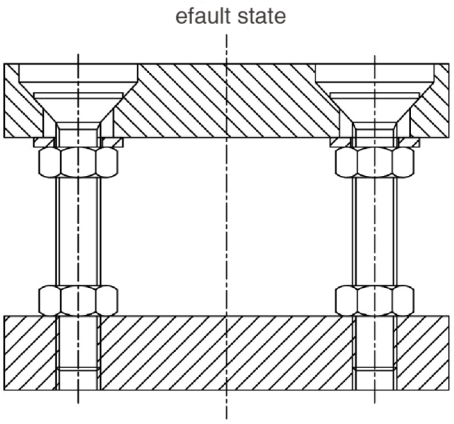

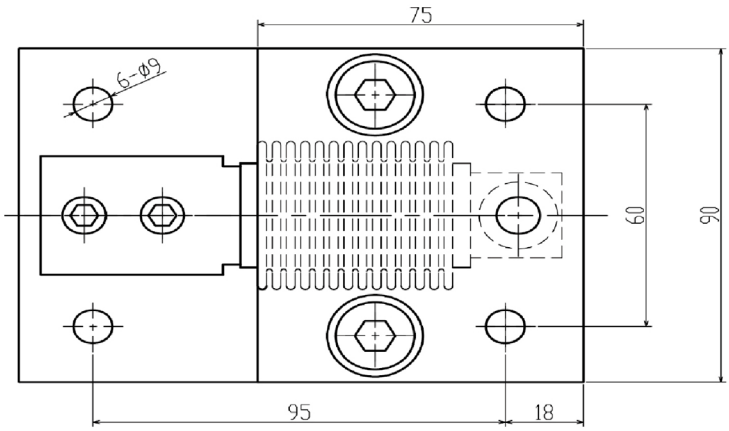


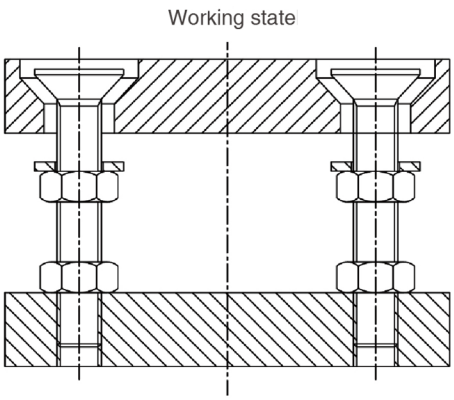


Installation




Tangential layout




Tangential layout

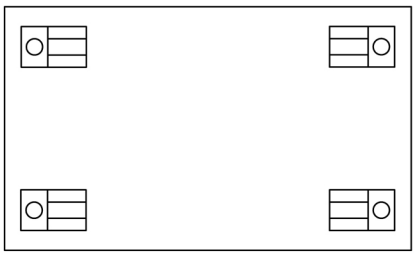

Rectangular layout



Radial Layout



Radial Layout

天津市丽景微电子设备有限公司
Lascaux Microelectronic Device (Tianjin) Co.,Ltd.

电话 (Tel): +86 22 83719630 83719631 83719632
传真 (Fax):+86 22 83719632